

The fine Italian type.

For anyone who loves terrazzo, but prefers a more delicate and refined look, PANDOMO TerrazzoMicro is the product of choice. With this new system, based as it is on a specially developed binding agent matrix and fine, mineral decorative granulations, we have created homogeneous floor surfaces capable of withstanding heavy loads, and all with an individual terrazzo look. The result is that the fine grained mineral additives produce an homogeneous, calm and superior surface. Although the

emphasis is more discreet, the typical terrazzo character is nevertheless preserved. The product's extreme load resistance, coupled with a high degree of design freedom, combine to give PANDOMO TerrazzoMicro a unique advantage: a minimum layer thickness of only 11 mm. As a result, TerrazzoMicro can also be used in areas in which, due to either structural engineering considerations or limited structural heights, it would not be possible to lay a traditional terrazzo floor.



Wonderfully economical.

The product and working advantages of PANDOMO TerrazzoMicro make it possible to put down up to 300 m² a day, whilst the low structural height also ensures a much reduced need for material. Considered from an economic point of view, therefore, PANDOMO TerrazzoMicro is also a masterpiece.

Success on all floors.

No other terrazzo floor is so easy to lay or has so many uses as PANDOMO TerrazzoMicro. The small structural height, the associated low surface weight and the revolutionary rapid drying process combine to make PANDOMO TerrazzoMicro the ideal solution for elegant, heavily trafficked floor surfaces, both in new buildings and existing ones.

Quick and elegant.

The specially developed binding agent matrix can be walked on after as little as 8 hours and can be sanded after 24 hours. If a new screed is required, the system product subscreed PANDOMO ATS offers the ideal solution. As little as one day after it has been put down, a start can be made on the PANDOMO TerrazzoMicro work with the whole surface being usable after just 5 working days. The result is a saving in time of up to 6 weeks, compared with traditional structures where a conventional screed is made.



Fascinating possibilities.

PANDOMO TerrazzoMicro systems floor surfaces are produced from two components: a more or less tension-free binding agent matrix, available in either black or white, and fine mineral additives (decorative granulations). By the addition of defined powder pigments, the white matrix can perfectly easily be dyed to any individually desired shade. Combined with individual decorative granulation mixes, the PANDOMO TerrazzoMicro system offers an unbelievable variety of design possibilities.

PANDOMO ATS


Subscreed: a rapid screed as substructure for PANDOMO TerrazzoPlus and PANDOMO TerrazzoMicro floors. Walkable after 8 hours and ready for covering with TerrazzoMicro after just one day.

PANDOMO TerrazzoMicro binding agent matrix

PANDOMO MW: white
PANDOMO MB: black

PANDOMO TG decorative granulation

6 granulation colours: nero, bianco, bianco-rosé, rosso, marrone-ocra and grigio-chiaro
1 granulation size: fine (1–3 mm)

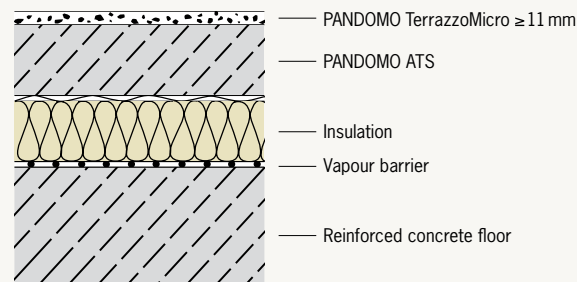


Covers every colour.

Produce your very own PANDOMO TerrazzoMicro creation with the terrazzo look. The following illustrations provide examples of the surfaces that can be created on a scale of 1:1. Further detailed information and suggestions can be found in the PANDOMO booklet.



M 1.305
PANDOMO MW and
PANDOMO TG bianco 1–3 mm

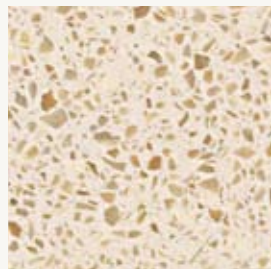

M 1.311
PANDOMO MW and
PANDOMO TG marrone-ocra
1–3 mm



M 1.306
PANDOMO MW and
PANDOMO TG rosso 1–3 mm



M 1.304
PANDOMO MW and
PANDOMO TG nero 1–3 mm



M 2.425
PANDOMO MB and
PANDOMO TG nero 1–3 mm



M 3.409
PANDOMO MB and MW
PANDOMO TG grigio-chiaro
1–3 mm

All colour standards have been produced by printing process and are intended only by way of recommendation. Colours shown may differ from colours mentioned.

PANDOMO TerrazzoMicro product performance.

- A high-quality surface with a terrazzo look.
- Particularly well suited to heavily frequented areas in new buildings and existing ones.
- New binding agent system with high early strength; as a result curing is more or less tension-free and has low shrinkage.
- Large areas can be created without problems and without grouting.
- All system components from a single-source.
- Fast and reliable incorporation in indoor environments for layer thicknesses starting from 11 mm.
- Combined with PANDOMO ATS as a screed, the substrate can take PANDOMO TerrazzoMicro after just one day.
- High-quality standard: Terrazzo surfaces laid by trained ARDEX partner firms.
- More economical than traditional Terrazzo.
- Suitable for use on hot water underfloor heating systems.
- Pot life: 30 mins.
- Walkable after 8 hours, can be sanded after 24 hours' drying time.
- Compressive strength: 45 N/mm².
- Flexural tensile strength: 5.0 N/mm².



ARDEX GmbH
Friedrich-Ebert-Straße 45
58453 Witten
GERMANY
Tel.: +49 (0) 23 02/664-505
Fax: +49 (0) 23 02/664-437
pandomo@ardex.de
www.ardex-pandomo.de



The new
type of terrazzo.

Quick, attractive, strong
and always a one-off.