

Rediscovery of a classic.

PANDOMO TerrazzoPlus offers the planner unlimited design opportunities. The revolutionary new binding agent system, available in black and white, the individual composition of the decorative granulations and the fact that the binding agent matrix can be dyed make PANDOMO TerrazzoPlus unique. The increased desire for surface-ready screeds with a Terrazzo finish can now be accom-

modated from an economical perspective as well. An impressive feature of PANDOMO TerrazzoPlus is its high early strength and the extremely fast speed with which Terrazzo surfaces can be taken into use. Good reasons for the product's nomination for the design prize of the Federal Republic of Germany in 2007.



High-quality appearance.

PANDOMO TerrazzoPlus is a compact, finely sanded floor system. The floor has a very natural appearance and follows organic lines. It consists of a layer which is at least 25 mm thick and which is extremely stable under pressure and resistant to wear. PANDOMO TerrazzoPlus is, therefore, particularly suitable for heavily frequented areas in both new and existing buildings.

Soon dry, soon ready.

With a drying time which is revolutionary for terrazzo, the floor can be sanded after as little as 24 hours and can be taken into use after just four days.



Goes with any style.

PANDOMO TerrazzoPlus harmonises easily with any architectural style, being just as suitable for modern new buildings as it is for renovation and conversion work on traditional surfaces. With the possibility of creating monochrome surfaces, PANDOMO TerrazzoPlus provides an additional emphasis for the puristic demands of architects.



Possibilities without limits.

Based on two binding agent systems (black and white), PANDOMO TerrazzoPlus offers as standard five different mineral additives (decorative granulations). These are available in screen sizes fine, semi fine and semi coarse. By the addition of defined powder pigments the white binding agent matrix can be dyed to suit individual wishes, thus guaranteeing a virtually endless spectrum of design possibilities.

PANDOMO ATS

Subscreed: rapid screed as substructure for PANDOMO TerrazzoPlus and PANDOMO TerrazzoMicro floors. Walkable after 8 hours and ready to take coverings after 1 day.

PANDOMO TerrazzoPlus binding agent matrix


PANDOMO PW: white
PANDOMO PB: black

PANDOMO TG decorative granulation

6 granulation colours: nero, bianco, bianco-rosé, rosso, marrone-ocra and grigio-chiaro
3 granulation sizes: fine (1–3 mm), semi fine (3–5 mm), semi coarse (6–9 mm)


PANDOMO TF W/B

Filling compound: black and white

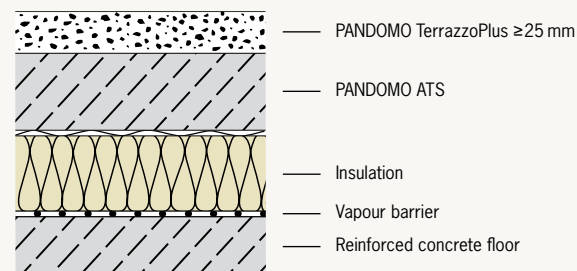


It doesn't get any more individual than this.


Configure your surface-ready screed with a terrazzo look entirely to your own wishes and needs. The following illustrations offer an idea of the variety of surfaces which can be created with PANDOMO TerrazzoPlus (scale: 1:1).

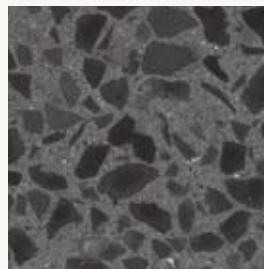

P 2.109
PANDOMO PB
and PANDOMO TG nero
3–5 mm and 6–9 mm

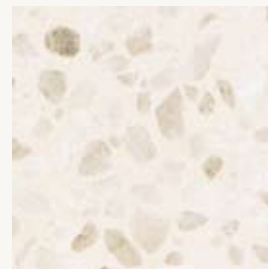

P 1.103
PANDOMO PW
and PANDOMO TG bianco
3–8 mm

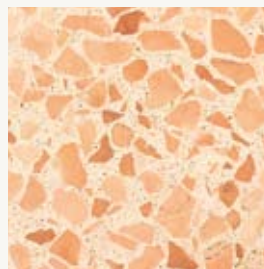

P 1.107
PANDOMO PW
and PANDOMO TG rosso
3–5 mm and 6–9 mm



P 1.112
PANDOMO PW
and PANDOMO TG marrone-ocra
3–5 mm and 6–9 mm



P 1.149
PANDOMO PW
and special grain



P 3.182
PANDOMO PB and PW
PANDOMO TG Grigio-Chiaro
3–5 mm and 5–7 mm

All colour standards have been produced by printing process and are intended only by way of recommendation. Colours shown may differ from colours mentioned.

PANDOMO TerrazzoPlus product performance.

- A high-quality surface with a terrazzo look.
- Particularly well suited to heavily frequented areas in new buildings and existing ones.
- New binding agent system with high early strength; as a result curing is more or less tension-free and has low shrinkage.
- Large areas can be created without problems and without grouting.
- All system components from a single-source.
- Fast and reliable incorporation in indoor environments for layer thicknesses starting from 25 mm.
- High-quality standard: Terrazzo surfaces laid by trained ARDEX partner firms.
- More economical than traditional Terrazzo.
- Can be used in the system on separation course, insulating layer and as heated screed.
- Pot life: 60 mins.
- Walkable after 8 hours, can be sanded after 24 hours' drying time.
- Compressive strength: 60 N/mm².
- Flexural tensile strength: 6 N/mm².



ARDEX GmbH
Friedrich-Ebert-Straße 45
58453 Witten
DEUTSCHLAND
Tel.: +49 (0) 23 02/664-505
Fax: +49 (0) 23 02/664-437
pandomo@ardex.de
www.ardex-pandomo.de



The new type of terrazzo.

Quick, attractive, strong and always a one-off.



panDOMO®
TerrazzoPlus